
Station Wagon



Citroen





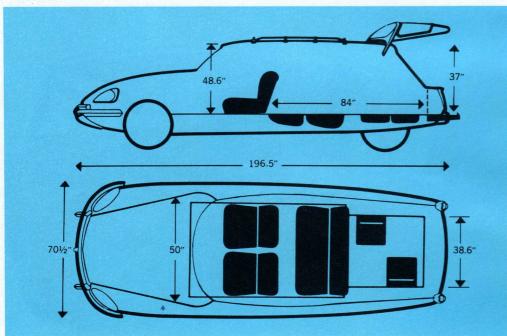

Citroen reserves the right to change and/or modify equipment and/or specifications without notice and without responsibility to previous models, on any model at any time.

Citroen

Your Authorized Citroen Dealer is:

TECHNICAL SPECIFICATIONS CITROEN D-21 WAGON

Displacement—cc: 2175 cc. Displacement—cu. in.: 132.7 cu. in. Compression Ratio: 8.75 to 1. SAE Power @ rpm: 117 bhp @ 5750 rpm. Max. Torque S.A.E.: 128 ft./lbs. @ 3000-3500 rpm. Central Spark Plug Location: Yes. Bore: 3.5 in. 90 mm. Stroke: 3.3 in. 85.5 mm. Combustion Chamber: Hemispherical. Cylinder Head: Aluminum alloy. Intake Manifold: External. Oil Filter: Internal with bi-pass, plus screen in sump. Radiator: Copper core 60 mm. Cooling System: Water pump & thermostat. Fan: 8 Blade nylon. Fuel Pump: Mechanical. Alternator: 35A x 12V with voltage regulator. Battery: 12 Volts-55 AH. Valve Arrangement: 60-OHV. Carburetor: Double barrel Weber 28 x 36 DDE. Exhaust: Dual system with rear expansion chamber. Cam Shaft: 4 bearings, high lateral position chain drive. Pistons: Recessed dome. Connecting Rods: Positive centered cap. Crankshaft: Main Bearings: 5. Clutch: Single Plate Dry type. Gear Box: 4 speed fully synchromesh with manual shift or Citromatic Drive (optional). Final Drive: Spiral Bevel-8 x 35, 4.375 to 1. Gear Ratios: 1st-14.21 to 1, 2nd-8.05 to 1, 3rd-5.30 to 1, 4th-3.73 to 1, R-13.80 to 1. Drive Shaft: Double/ constant velocity tripod universals. Front Wheel Drive: Standard. Brakes: Power assisted Dual Independent System with Proportional action: Front: Inboard Disc with two opposed pistons caliper. Rear: Drum.

Emergency Brakes: Mechanical on front disc: Autonomous system with separate pads. Brake pressure warning: Light on dash. Brake Pad Wear Warning: Light on dash. Brake Cooling: Large underpan ducts. Exhaust Emission: Controlled by Air injection. Steering System: Rack & Pinion Power assist.
Wheels: Steel, 5 studs. Tires: New All-Weather Michelin Radial Steel Cord with Asymmetrical Construction and Tread Design: 180 x 380 size. Front pressure: 30 lbs. Rear pressure: 30 lbs. Suspension System: Hydropneumatic. Variable Ground Clearance: Yes. Power Jacking: Yes. Constant Level Ride: Yes. Integral Hydropneumatic Shock Absorbers: Special High Speed. 1 Piece Body Frame All Steel Construction: Yes. Factory Rust Proofing: Prepaint by electrophoresis. Underpan: Full length. Headlights: Sealed beam, U.S. Model. Horns: Custom triple. Weight: 3000 lbs. Safety Glass As-1 As-2: Yes. Tinted Glass: Optional, windshield. Wheelbase: 123". Overall Length: 196.5". Overall Width: 70.5". Fuel Tank Capacity: 17 gallons. Crank Case Capacity: 5¼ qts. with filter change. Gear Box Capacity: 2 quarts. Radiator Capacity: 11 qts. Single Heater. 14 qts. Dual. Gas Mileage: 25/27 mpg. Heater & Defrosters with Electric Blower: Standard. Folding Front Center Arm Rest: Optional. Custom Air Conditioning: Optional-Factory Installed. Custom AM-FM or AM Radios: Optional. Roof Antenna: Optional. Reclining Bucket Seats: Standard. "Leather-Tex" Upholstery: Standard. Dual 2-Speed Electric Wipers: Standard. Dual Windshield Washers: Standard. Precision Electric Clock: Standard. Models Available: "Comfort" 7-8